


REVISIONS		
REV.	DESCRIPTION	DATE
A	WTV	01/1997
B	ECO #302	01/30/17
C	ECO #358	02/01/19

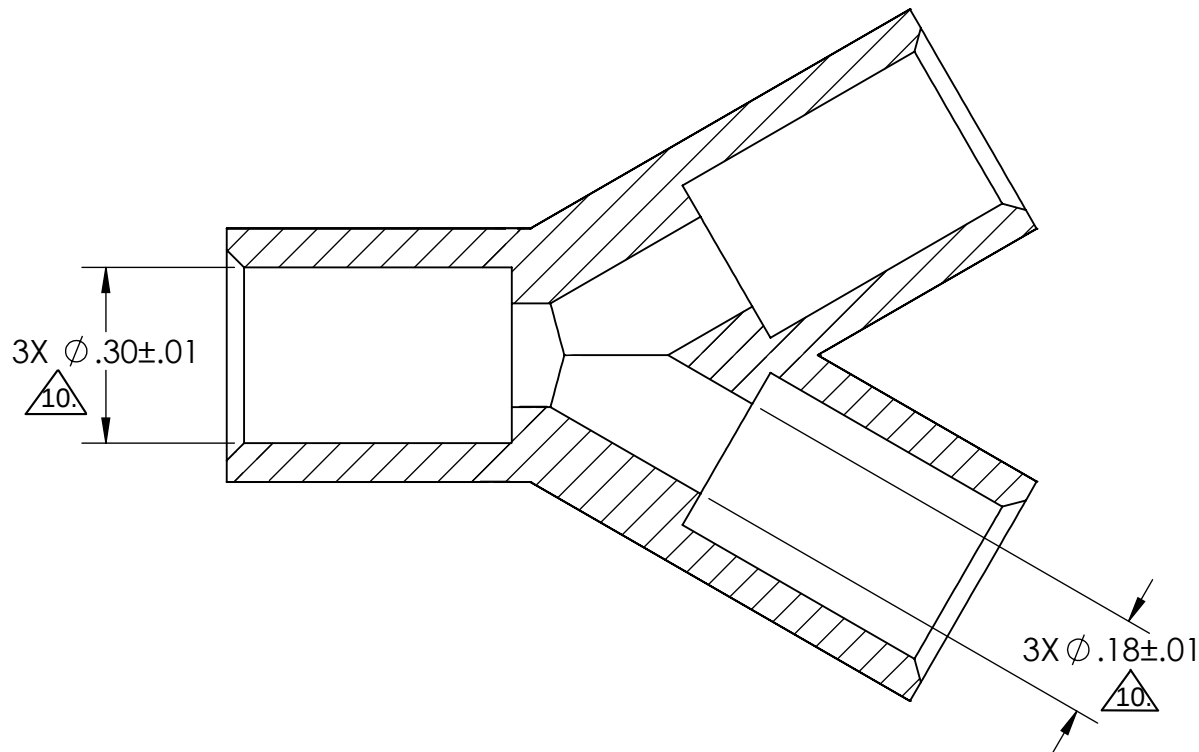

1. EMBEDDED PARTICULATE / CLEALINESS PER 01-014-WI
2. FLASH .010 MAX., FIRMLY ATTACHED.
3. GATE + OR - .010 MAXIMUM
4. SINK IN INSIDE DIAMETER .008 MAXIMUM
5. MAT'L: TEKNOR APEX 95A0937C-80NT OR EQUIVALENT. VIRGIN W/ CERTS
6. DOUBLE BAG PARTS IN 1.5mm P.E. BAGS.
7. INSPECT PER MIL-STD 105D AT 1.0 AQL.
8. PARTS TO BE MANUFACTURING IN CLASS CONTROLLED ENVIRONMENT.
9. COSMETIC CRITERIA PER 01-02-WI, CONNECTOR BODY IS CLASS II-B.

10. INDICATED INSPECTION DIMENSION.

SECTION VIEW

FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm$
ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$
TWO PLACE DECIMAL $\pm .030$
THREE PLACE DECIMAL $\pm .010$

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL

APPROVED

DO NOT SCALE DRAWING

BREVET, INC.

TITLE:

**503 Y CONNECTOR
3/16 X 3/16 X 3/16
.062 WALL TUBING**

ORDER NO.

DWG. NO.

REV

Y6

503-333-N-03

C