


REVISIONS		
REV.	DESCRIPTION	DATE
A	WTV	01/97
B	ECO #327	12/17

1. EMBEDDED PARTICULATE / CLEANLINESS PER 01-014-WI.
2. FLASH .010 MAX., FIRMLY ATTACHED.
3. GATE + OR - .010 MAXIMUM.
4. SINK IN INSIDE DIAMETER .008 MAXIMUM.
5. MAT'L: TEKNOR APEX 95A0937C-80NT OR EQUIVALENT. VIRGIN W/CERTS.
6. DOUBLE BAG PARTS IN 1.5-2.0MIL P.E. BAGS.
7. INSPECT PER MIL-STD 105D AT 4.0 AQL.
8. PARTS TO BE MANUFACTURING IN CONTROLLED ENVIRONMENT.
9. COSMETIC CRITERIA PER 01-02-WI, CONNECTOR BODY IS CLASS II-B.

 INDICATES INSPECTION DIMENSION.

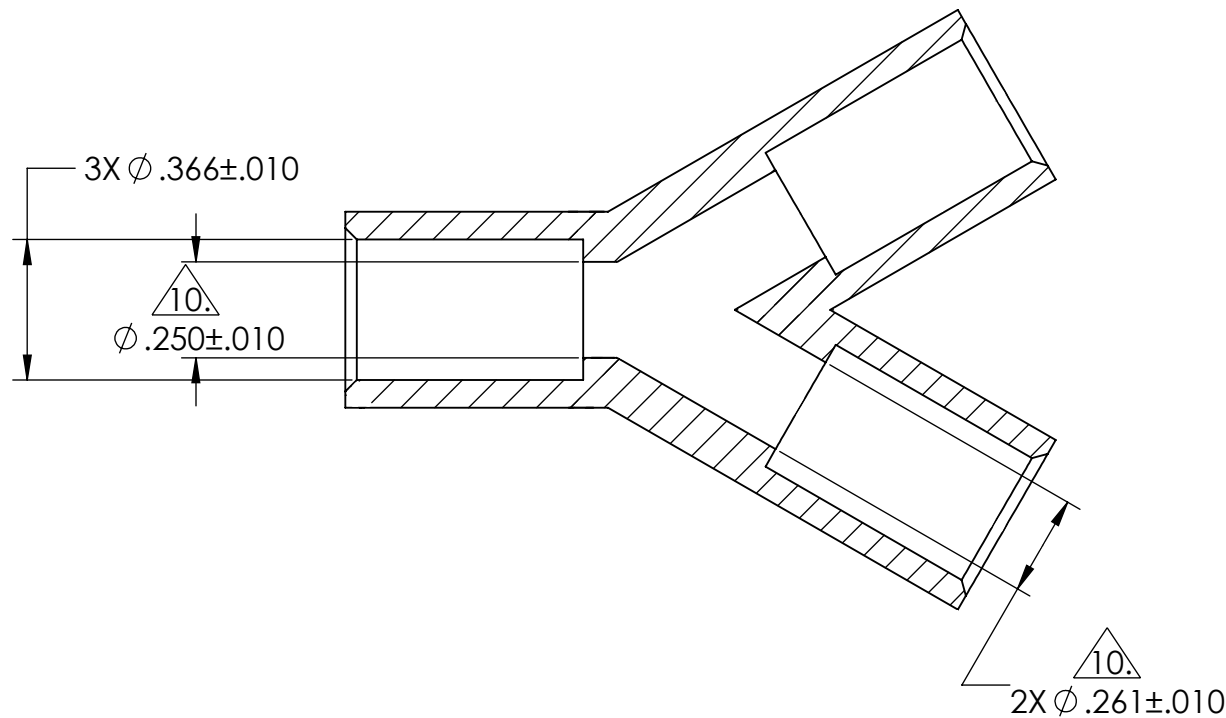

SECTION VIEW

FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm .015$
ANGULAR: $\pm .5^\circ$
ONE DECIMAL $\pm .015$
TWO PLACE DECIMAL $\pm .010$
THREE PLACE DECIMAL $\pm .005$

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL

APPROVED

DO NOT SCALE DRAWING

BREVET, INC.

TITLE:
**503 Y CONNECTOR
1/4 X 1/4 X 1/4
.062 WALL TUBING**

ORDER NO.	DWG. NO.	REV
Y3	503-444-N-03A	B