

4


3

2

1

B

B

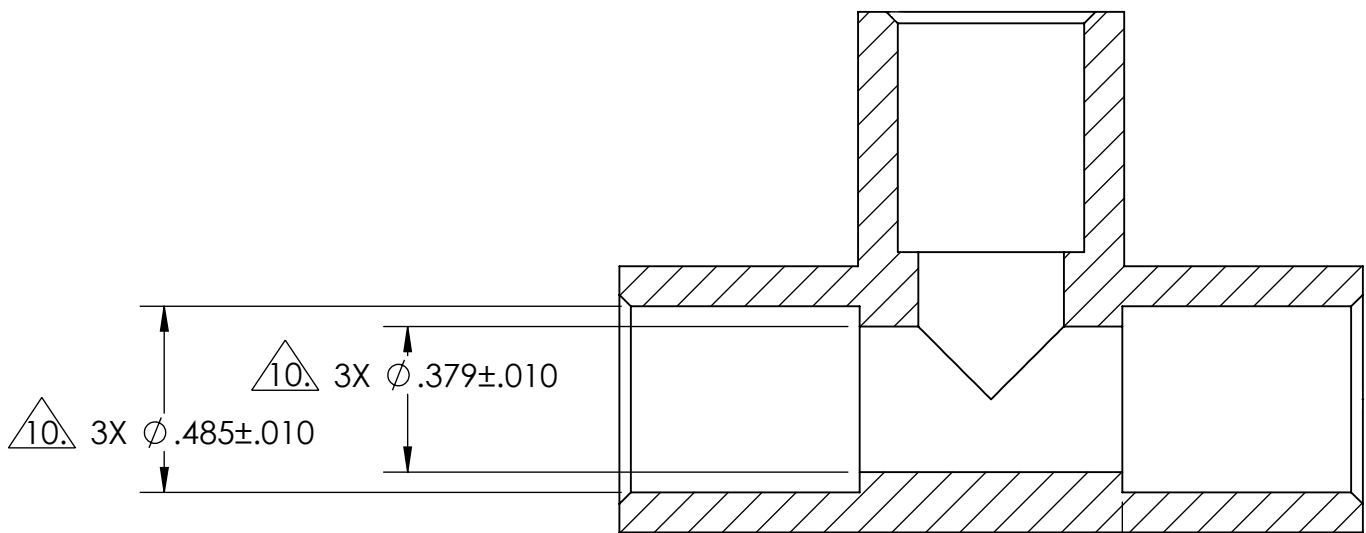

SECTION VIEW

- 1. EMBEDDED PARTICLE / CLEANINESS PER 01-014-WI.
- 2. FLASH .010 MAX, FIRMLY ATTACHED.
- 3. GATE +/- .010 MAXIMUM.
- 4. SINK IN INSIDE DIAMETER .008 MAXIMUM.
- 5. MAT'L: NORTON S-125-M-70-A
OR EQUIVALENT, VIRGIN W/CERTS.
*N04: ST. GOBAINS RESIN PART #A0002820-1
*N05: ST. GOBAINS RESIN PART #A0004864-1
- 6. DOUBLE BAG PARTS IN 1.5MM P.E. BAGS.
- 7. INSPECT PER MIL-STD 105D AT 4.0 AQL.
- 8. PARTS TO BE MANUFACTURED IN CONTROLLED ENVIRONMENT.
- 9. COSMETIC CRITERIA PER 01-02-WI,
CONNECTOR BODY IS CLASS II-B.
- 10. INDICATES ATTRIBUTE INSPECTION DIMENSION.

A

A

FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:		BREVET, INC.		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ±1.0° BEND ±1.0° TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±.010		TITLE: 504 "T" CONNECTOR 3/8 X 3/8 X 3/8 .062 WALL TUBING		
INTERPRET GEOMETRIC TOLERANCING PER:		SIZE	DWG. NO.	REV
MATERIAL		B	504-661	D
FINISH				
DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

4

3

2

1