

4

3

2

1

D

D

C


C

B

B

A

A

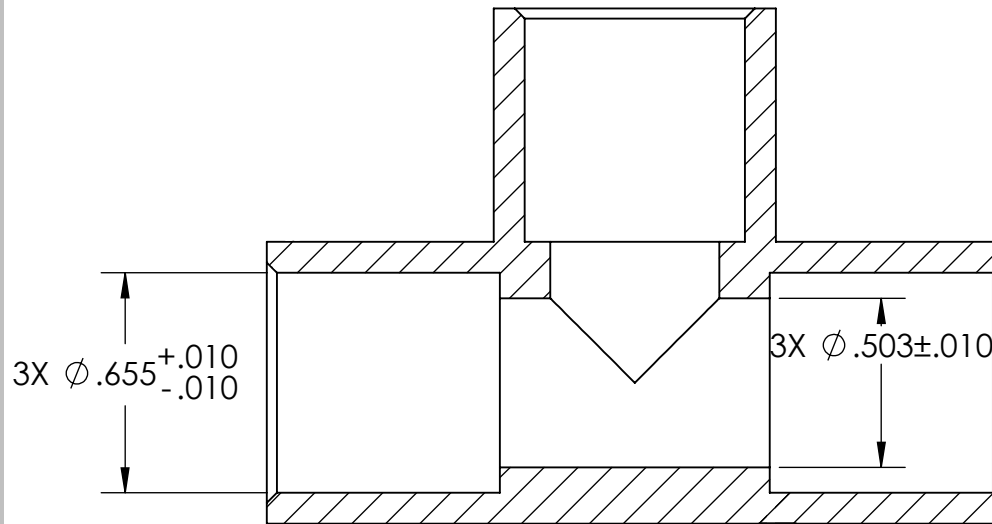

SECTION VIEW

FOR REFERENCE ONLY

1. EMBEDDED PARTICULATE / CLEANLINESS PER 01-014-WI.
2. FLASH .010 MAX, FIRMLY ATTACHED.
3. GATE + OR - .010 MAXIMUM.
4. SINK IN INSIDE DIAMETER .008 MAXIMUM.
5. MAT'L: NORTON S-125-M-70-A OR EQUIVALENT, VIRGIN W/CERTS.  
\*N04: ST. GOBAINS RESIN PART #A0002820-1  
\*N05: ST. GOBAINS RESIN PART #A0004864-1
6. DOUBLE BAG PARTS IN 1.5MM P.E. BAGS.
7. INSPECT PER MIL-STD 105D AT 4.0 AQL.
8. PARTS TO BE MANUFACTURED IN CONTROLLED ENVIRONMENT.
9. COSMETIC CRITERIA PER 01-02-WI, CONNECTOR BODY IS CLASS II-B.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
ANGULAR: MACH  $\pm 1.0^\circ$  BEND  $\pm 1.0^\circ$   
TWO PLACE DECIMAL  $\pm$   
THREE PLACE DECIMAL  $\pm .010$

INTERPRET GEOMETRIC  
TOLERANCING PER:

MATERIAL

APPROVED

DO NOT SCALE DRAWING

BREVET, INC.

TITLE:

504 "T" CONNECTOR  
1/2 X 1/2 X 1/2  
.093 WALL TUBING

SIZE

A

P/N

504-881-N-\*\*

REV

D

4

3

2

1